



## Mobile LCD Poster-43" Specifications

---



### **FEATURES:**

- Outdoor waterproof
- Optical bonding technology
- High brightness 1500-2500nits
- 1920 x 1080 Max. resolution
- Touchable (optional function)
- Portable with wheels: 55kg only
- Up to 20 hours battery lifetime
- Max.105°C temperature resistance


Note: Product specifications subject to change without notice.

All rights reserved by LA Visual.

[www.lavisual.cn](http://www.lavisual.cn)



## Mobile LCD Poster-43" Specifications

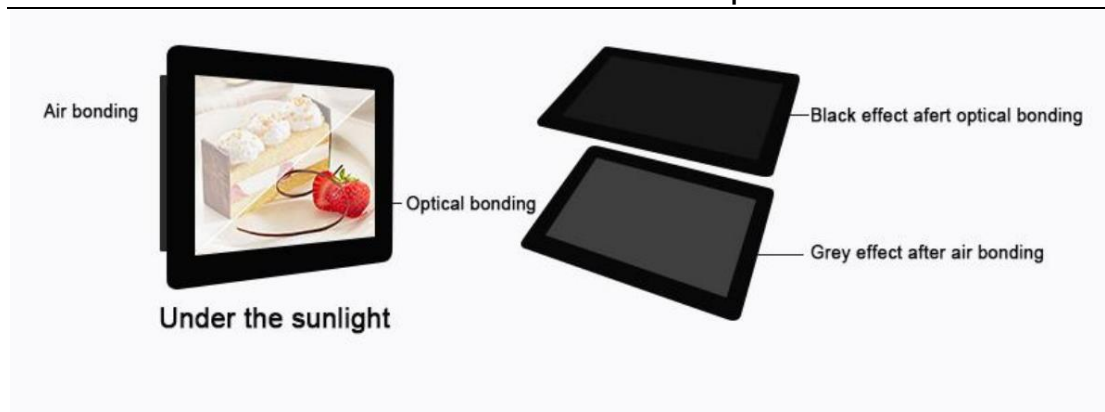

### Differences between Optical Bonding and Air Bonding display

#### Structure

Optical bonding: Use high-permeability glue between the tempered glass and the display screen without generating any gaps.

Air bonding: The touch layer and the border of the display are simply attached, there will be a gap between the two layers.

#### Display

Optical bonding: The interior of the screen assembly is tightly bonded so that there is no more specular reflection light, and the display screen is naturally clear and transparent.

Air bonding: There is an air layer between the touch layer and the display screen, which will reflect the light on the surface, defecting the screen contrast.

#### Tightness

Optical bonding: It generally uses optical adhesives, which can better adhere to the gaps between each layer and reduce the probability of air and dust entering.

Air bonding: Screens tend to fall off when hit, and dust can easily get in.

#### Application

Optical bonding: This kind of bonding technology is more difficult and expensive, so it is only applied on high-end models.

Air bonding: Low cost, commonly used in ordinary models.

Note: Product specifications subject to change without notice.

All rights reserved by LA Visual.

[www.lavisual.cn](http://www.lavisual.cn)



## Mobile LCD Poster-43" Specifications

Panel Type	43" TFT-LCD
Active Area (mm)	940.896(H)x 529.254(V)
Resolution	1920 x 1080 (FHD)
Aspect Ratio	16:9
Brightness (cd/m2)	1500/2000/2500 (optional)
Dimming	Auto dimming by Light Sensor
Colors	16.7 million
Viewing Angle	89 deg. (L/R/U/D)
Contrast Ratio	3000:1
Interface	USB2.0 x 2, RJ45
CPU	RK3288
RAM	2GB DDR4
ROM	8GB NAND
Wi-Fi	802.11b/g/n
Speaker	8Ω 5W x 2
Battery Type	Outdoor lithium iron phosphate battery
Charing Time	8 hours
Battery Capacity	62,000mAh
Voltage	24V
Power Consumption	58~110W
Brightness (optional)	1500/2000/2500 cd/m2
Battery Life (depends on brightness)	18 hours/15 hours/12 hours
Overall Size (WxHxD mm)	1244x614x190 mm
Package Size (WxHxD mm)	1510x800x370 mm
Net Weight (kg)	55kg
Operating Temperature	-20℃ to 70℃
Storage Temperature	-30℃ to 80℃
Operating Humidity	10% to 80%
Storage Humidity	5% to 95%
Accessories	Remote control, Instruction Manual, Charger & Charging Cable

Note: Product specifications subject to change without notice.

All rights reserved by LA Visual.

[www.lavisual.cn](http://www.lavisual.cn)



## Mobile LCD Poster-43" Specifications



Note: Product specifications subject to change without notice.

All rights reserved by LA Visual.

[www.lavisual.cn](http://www.lavisual.cn)