




Film LED Display Specifications

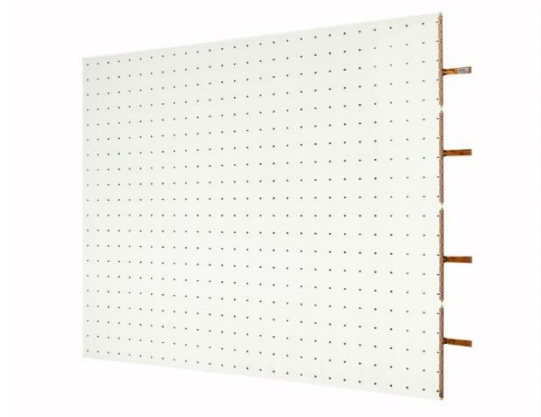

FEATURES:

Super Light & Slim (3~5mm thickness, 3~6kg/sqm)

Up to 85% High Transparency

High Flexibility (flexible & can be cut)

Easy to Install (structure free)

140 degree wide viewing angle

Lower Costs for Transportation & Installation

Note: Product specifications subject to change without notice.

All rights reserved by LA Visual.

www.lavisual.cn



Film LED Display Specifications

| | |
|------------------------|----------------------------------|
| Pixel Pitch (mm) | 4/8mm, 5/10mm, 6.5mm, 10mm, 20mm |
| Module Size (mm) | Customizable |
| Module Weight (kg/sqm) | 6kg/sqm |
| Module Thickness (mm) | 3~5mm |
| Maintenance | Front / Rear |
| Brightness (cd/m2) | 3000~5000cd/m2 |
| Refresh Rate (Hz) | 1920/3840Hz |
| Scan Mode | Static Scan |
| Viewing Angle | 140 degree (H/V) |
| Transparency | 55%~85% |
| Drive Type | Constant Current Driving |
| Input Voltage | AC 95V~240V |
| Power Consumption | 260W Avg. / 800W Max. |
| Operating Temperature | -20°C to 65°C |
| Storage Temperature | -35°C to 85°C |
| Operating Humidity | 10% to 90% |
| Storage Humidity | 5% to 90% |



Note: Product specifications subject to change without notice.

All rights reserved by LA Visual.

www.lavisual.cn